



SA-1200



DEW POINT
Digital control system of air dryer

SECADORES AIRE COMPRIMIDO

COMPRESSED AIR DRYERS

SÉCHEURS À AIR COMPRIMÉ




Secador de aire comprimido refrigerado con sistema de control digital, expansion directa, purga automática.

Refrigerated compressed air dryer with digital control system, direct expansion, automatic dryer.

Sécheur d'air comprimé réfrigéré à commande numérique, expansion directe, purge automatique.



SA-3600

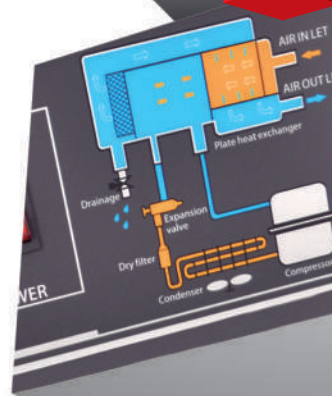

SA-2400



SECADORES COMPRESSED AIR DRYERS SÉCHOIR À AIR COMPRIMÉ

	SA-1200	SA-2400	SA-3600
	7,5/10hp	15/20hp	30/40hp
	V-220/50Hz - 1/2HP	V-220/50Hz - 3/4HP	V-220/50Hz - 3/4HP
	1200	2400	3600
	A: temperatura de entrada <i>inlet temperature température d'entrée</i> = 38/65°C B: temperatura ambiente <i>ambient temperature température ambiante</i> = 38/42°C C: presión de trabajo <i>working pressure pression de travail</i> 6 / 16 Bar		
	2°C --10°C Cuando la temperatura de entrada es 38°C, la temperatura ambiente es 38°C, el punto de rocío a presión es 2°C --10°C <i>2°C - 10°C when the inlet temperature is 38°C, the ambient temperature is 38°C, the pressure dew point is 2°C - 10°C</i> <i>2°C - 10°C lorsque la température d'entrée est 38°C, la température ambiante est 38°C, le point de rosée à pression est 2°C - 10°C</i>		
	R134A	R134A	R134A
	35	45	45
	-	420 x 520 x 740 mm.	420 x 520 x 740 mm.