




Doble rodillo encolador para curvos (BASIC C)  
 Double gluing roller for curves (BASIC C)  
 Double rouleau de collage pour courbes (BASIC C)



Velocidad variable Variable speed Vitesse variable

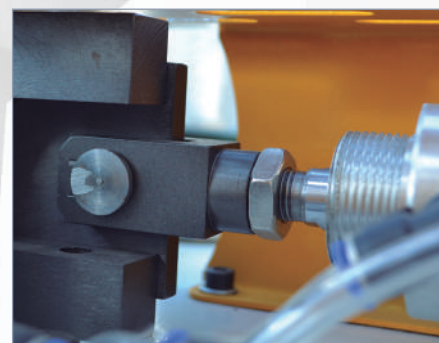

Cizalla de corte neumático Pneumatic cutting shears  
 Guillotine de coupe pneumatique

Alimentación de canto automático  
 Automatic edge feeding  
 Entraînement automatique du chant





**BASIC**

CHAPADORA DE CANTOS RECTOS  
 STRAIGHT EDGE BANDER  
 PLAQUEUSE DE CHANTS DROITS



**BASIC C**

CHAPADORA MANUAL DE CANTOS RECTOS Y CURVOS  
 STRAIGHT AND CURVED MANUAL EDGE BANDER  
 PLAQUEUSE MANUELLE DE CHANTS DROITS ET COURBES

	BASIC	BASIC C
Grueso máx. tablero Max. panel thickness Épaisseur max. panneau	60 mm.	60 mm.
Exesor mín./máx. canto Max/min edge thickness Épaisseur max./min. du bord	0,4-2 mm.	0,4-2 mm.
Velocidad de avance Feeding speed Vitesse d'entraînement	2-15 m/min.	2-15 m/min.
Medidas mesa Table dimensions Dimension table	900 x 700 mm.	900 x 700 mm.
Potencia Power Puissance	1,7 Kw.	1,7 Kw.
Voltaje Voltage Voltage	Mono.220V	Mono.220V
Presión aire Air pressure Pression d'air	6 Kg/cm <sup>2</sup>	6 Kg/cm <sup>2</sup>
	1.100 x 1.040 x 980 mm.	1.100 x 1.040 x 980 mm.
	130 Kg.	130 Kg.