


SC-250/1300 N

Sierra circular con carro deslizante
Circular saw with sliding table
Scie circulaire à chariot coulissant



Topo palograma Fence flip stop Bute palogram

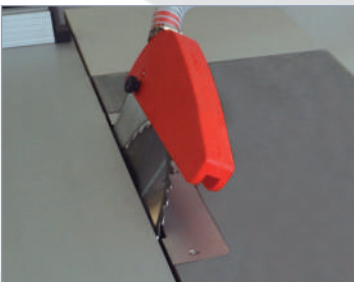


Inclinación 45° Tilt 45° Inclinaison 45°





Corte paralelo Cutting width Coupe parallèle

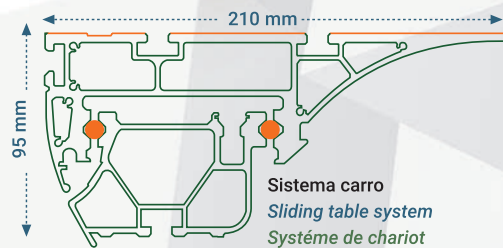

Carro deslizante Sliding table Chariot coulissant



Sistema carro
Sliding table system
Système de chariot

	SC-250/1300 N
Potencia motor Motor power Puissance moteur	3 Hp. (Mono.220V)
Ø Disco / Eje Blade / spindle Ø Disque / alésage	250/30 mm.
Capacidad corte Max. Cut Capacité coupe 90°	80 mm.
Capacidad corte Max. Cut Capacité coupe 45°	55 mm.
R.p.m. R.p.m. Tr./min.	4.000
Medidas mesa carro Sliding table dimensions Dimensions table chariot	600 x 450 mm.
Extensión mesa Extension table Table supplémentaire	400 x 280 mm.
Medidas mesa fundición Cast iron table dimensions Dimensions table en fonte	790 x 350 mm.
Extensión mesa paralela Rear extension table Table extensible parallèle	790 x 270 mm.
Largo carro aluminio Aluminium sliding table length Dimensions chariot aluminium	1.320 mm.
Recorrido carro deslizante Sliding table travel Déplacement charriot coulissant	1.350 mm.
Inclinación Tilt Inclinaison	0/45°
Capacidad corte paralelo Cutting width Capacité coupe en parallèle	610 mm.
Capacidad de corte escuadra Cross cut capacity Capacité de coupe en équerre	1.220/1.500 mm.
Ø Toma aspiración Dust inlet Ø Buse d'aspiration	1x30 / 1x100 mm.
 1.500 x 2.000 x 900 mm.	 170 Kg.